


HMG/T SERIES

Hydraulic magnets

The Hydraram HMG/T-series are operated by the hydraulic hammer-line of the excavator.

The magnets can be used for cycle times up to 55%.

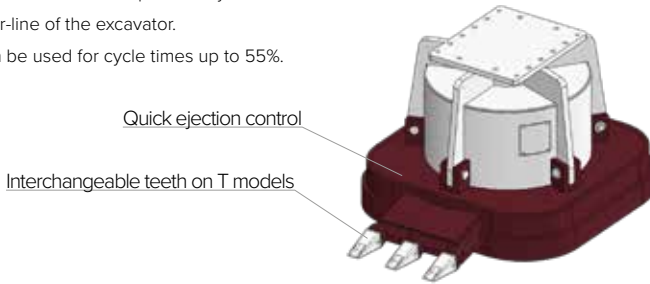

HYDRAULIC MAGNETS			HMG-850	HMG-950	HMG-1100	HMG-1150	HMG-1300	HMG-1500
	Excavator class ¹	t	10 - 16	14 - 20	18 - 28	20 - 30	26 - 38	30 - 60
	Weight	kg	780	960	1100	1200	1880	2500
	Working pressure	bar	180	180	180	180	180	180
	Oilflow	l/min	38 - 200	50 - 200	70 - 200	80 - 200	100 - 200	100 - 200
	Diameter	mm	850	950	1050	1130	1250	1500
	Output	kW	3.5	4.5	5.5	6	7	12
	Voltage	volt.	230	230	230	230	230	230
	Loose scrap	kg	500	700	900	1300	1800	3000
	Massive plate	kg	3500	3500	7000	11000	12000	20000

HYDRAULIC MAGNETS - TEETH			HMG-T850	HMG-T950	HMG-T1100	HMG-T1150	HMG-T1300	HMG-T1500
	Excavator class ¹	t	10 - 16	14 - 20	18 - 28	20 - 30	26 - 38	34 - 60
	Weight	kg	950	1130	1315	1400	2100	3000
	Working pressure	bar	180	180	180	180	180	180
	Oilflow	l/min	38 - 200	50 - 200	70 - 200	80 - 200	100 - 200	100 - 200
	Diameter	mm	850	950	1050	1130	1250	1500
	Output	kW	3.5	4.5	5.5	6	7	12
	Voltage	volt.	230	230	230	230	230	230
	Loose scrap	kg	500	700	900	1300	1800	3000
	Massive plate	kg	3500	3500	7000	11000	12000	20000

¹ Recommended excavator / attachment combination
HMG-T Equipped with replaceable teeth

